

For Earth, For Life
Kubota

POWER TILLER

NC PLUS X SPECIAL

POWERED BY KUBOTA DIESEL ENGINE

ZT PLUS

SPECIAL CAST IRON (SCI)

Made of special cast iron that makes gear housing strong and durable

FOUR-GEAR SYSTEM

Quick operation with three forward gears and one reverse gear

Extra sleeve protection keeps the gear lever safe—minimizing damage and extending machine life

880 mm. EXTRA LARGE WHEELS

Extra-large wheel sizes enhance ground pecking, reduce slipping, suitable for general soil preparation and swampy soil conditions

Note: Fender is not included in the standard package




**DURABLE AND VERSATILE FOR ALL
AGRICULTURAL NEEDS**

SPECIFICATIONS

Dimension	Width (minimum / maximum)	mm	1,270 / 1,370
	Length		2,960
	Height		1,349
Diameter of cage wheels			880
Power Tiller belt		mm (inches)	1,854 (73)
Engine Pulley			89 (4)
Clutch Pulley			180 (7)
Diameter of implement hitching pin		mm	26
Break System			Drum brake
Clutch System			Dry multi-plates clutch
Gear Oil			SAE, No. 90
Gear Oil Capacity		L	5.5-6
Gear ratio (between Power Tiller clutch pulley and wheels)	1st speed		44: 1
	2nd speed		23: 1
	3rd speed		8: 1
	Reverse speed		56: 1
Maximum speed		km/h	15
Net weight of Power Tiller (excluding engine)		kg	254
Size of power engine		hp	12.5 - 15.5

FEATURES

Gear System for durability

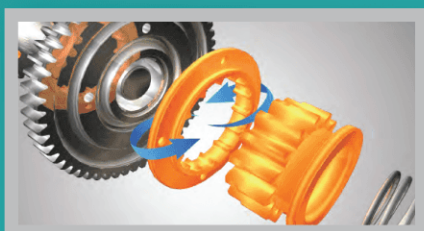


Smart gear design spreads load evenly for a tougher gearbox—plus reversible gears double its lifespan.

Safety Bolt extends the service life



The gear insert system minimizes damage risk, helping extend the service life of the NC PLUS Power Tiller.

Agile and flexible for a speedy work

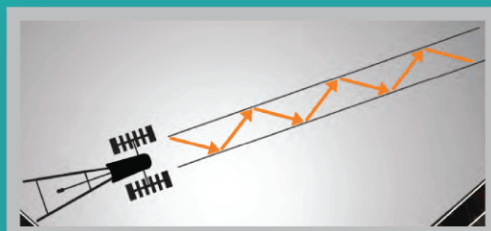

The steering gear features additional grooves for smoother straight-line control and reduced operator effort.

POWERED BY ZT PLUS DIESEL ENGINE



ZT155 PLUS



ZT140 PLUS



ZT125 PLUS

Kubota

KUBOTA Philippines, Inc.

232 Quirino Highway, Baesa, Quezon City, Metro Manila
TEL.: +632 8422-3500 to 05



kubota.com.ph